



TECNOCAT STORAGE

CLA | CLAW

CLA | CLAW

STORAGE

CLA



 MAX	3700x2600 mm
kW	3 kW
AIR	7 bar [100 psi] - 10 l/min

STORAGE

CLAW




 MAX	3700x2600 mm
kW	3 kW
AIR	7 bar [100 psi] - 10 l/min




	A		B
CLA-100 / CLAW-100	110 mm	2000 kg	205 mm
CLA-150 / CLAW-150	150 mm	2500 kg	245 mm
CLA-200 / CLAW-200	200 mm	3500 kg	295 mm
CLA-250 / CLAW-250	250 mm	4500 kg	345 mm
CLA-300 / CLAW-300	300 mm	5500 kg	395 mm
CLA-350 / CLAW-350	350 mm	6500 kg	465 mm
CLA-400 / CLAW-400	400 mm	7500 kg	515 mm

CLA

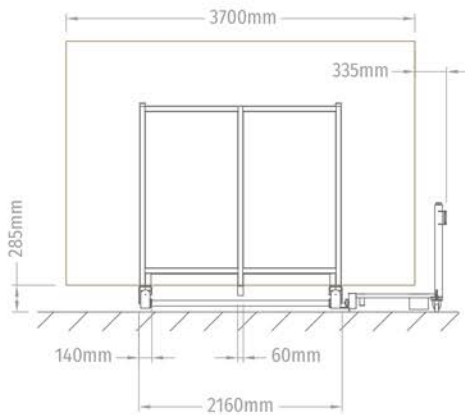


CLAW

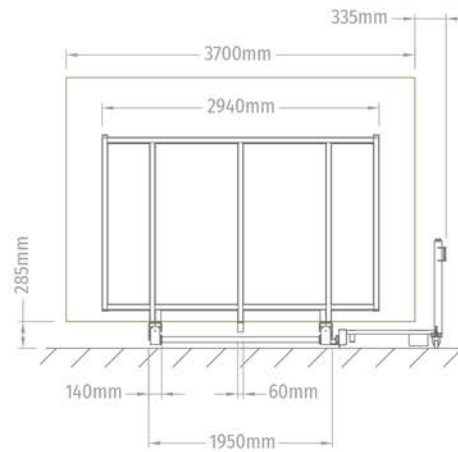

STORAGE

CLA | CLAW

$$L \text{ (mm)} = \Sigma B + 850 \text{ (O)} + 345$$

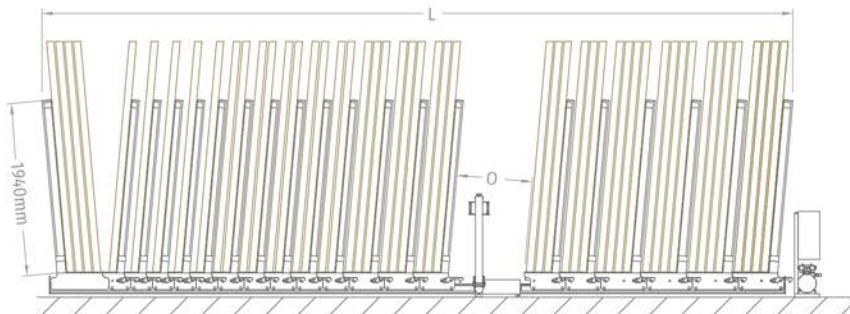

TILTING SECURITY SHAPE

PICTOGRAMS



ELECTRICAL POWER



NOMINAL ELECTRIC POWER



ENERGY AUTONOMY BY BATTERIES



PNEUMATIC SUPPLY



MAXIMUM LOAD CAPACITY



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



TILTING EQUIPMENT



MANUALLY TILTING EQUIPMENT



PNEUMATIC TILTING EQUIPMENT



MOTORIZED TILTING EQUIPMENT



HYDRAULIC TILTING EQUIPMENT



ROTATION EQUIPMENT



MANUAL ROTATION EQUIPMENT



PNEUMATIC ROTATION EQUIPMENT



MOTORIZED ROTATION EQUIPMENT



HYDRAULIC ROTATION EQUIPMENT



EQUIPMENT WEIGHT



VACUUM SYSTEM AIR FLOW



PUSHBUTTON CABLE LENGTH



WIRELESS PUSHBUTTON



LOAD CAPACITY ACCORDING EN-13155



EQUIPMENT SUPPORT SYSTEM



LIFTING CRANE USABLE ROTATION