



TECNOCAT STORAGE
CLA3D | CLA3DW

CLA3D | CLA3DW

STORAGE

CLA3D

 (2X) 3300x2600 mm

kW 3 kW

AIR 7 bar [100 psi] - 10 l/min

CLA3DW

 (2X) 3700x2600 mm

kW 3 kW

AIR 7 bar [100 psi] - 10 l/min


STORAGE






	A		B
CLA3D-150 / CLA3DW-150	150 mm	6000 kg	285 mm
CLA3D-200 / CLA3DW-200	200 mm	8000 kg	335 mm
CLA3D-250 / CLA3DW-250	250 mm	10000 kg	385 mm
CLA3D-300 / CLA3DW-300	300 mm	12000 kg	435 mm
CLA3D-350 / CLA3DW-350	350 mm	14000 kg	505 mm
CLA3D-400 / CLA3DW-400	400 mm	16000 kg	555 mm

CLA3D

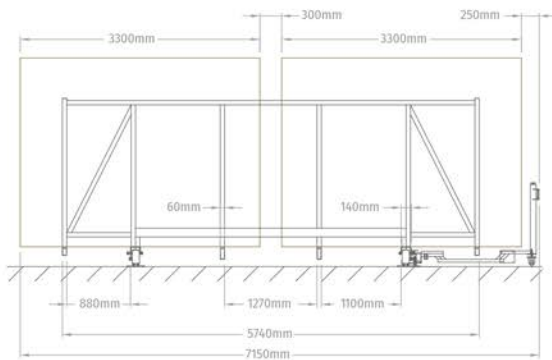


CLA3DW

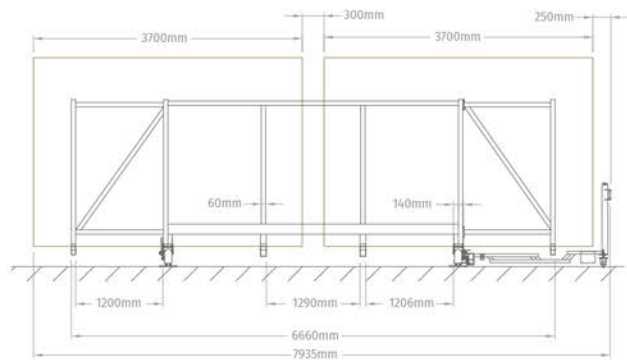

STORAGE

CLA3D | CLA3DW

$$L \text{ (mm)} = \Sigma B + 850 \text{ (O)} + 410$$

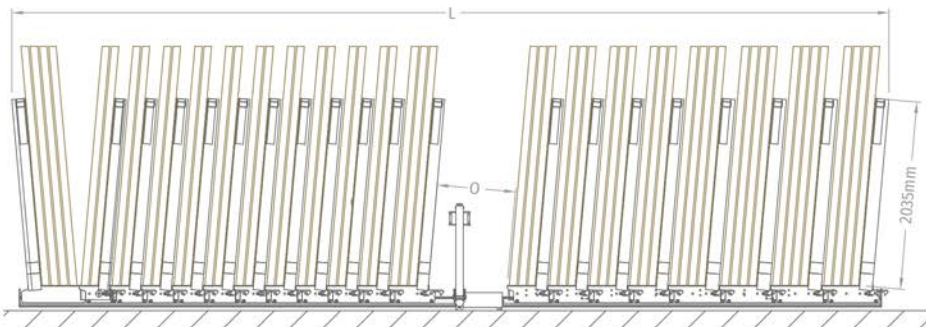

TILTING SECURITY SHAPE

PICTOGRAMS



ELECTRICAL POWER



NOMINAL ELECTRIC POWER



ENERGY AUTONOMY BY BATTERIES



PNEUMATIC SUPPLY



MAXIMUM LOAD CAPACITY



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



TILTING EQUIPMENT



MANUALLY TILTING EQUIPMENT



PNEUMATIC TILTING EQUIPMENT



MOTORIZED TILTING EQUIPMENT



HYDRAULIC TILTING EQUIPMENT



ROTATION EQUIPMENT



MANUAL ROTATION EQUIPMENT



PNEUMATIC ROTATION EQUIPMENT



MOTORIZED ROTATION EQUIPMENT



HYDRAULIC ROTATION EQUIPMENT



EQUIPMENT WEIGHT



VACUUM SYSTEM AIR FLOW



PUSHBUTTON CABLE LENGTH



WIRELESS PUSHBUTTON



LOAD CAPACITY ACCORDING EN-13155



EQUIPMENT SUPPORT SYSTEM



LIFTING CRANE USABLE ROTATION