TECNOCAT
TECNOLOGÍA E
INNOVACIÓN

TECNOCAT STORAGE

CLA6D | CLA6DW

www.tecnocat.com

CLA6D | CLA6DW

STORAGE

CLA6D

MAX	(1X) 6100x3300 mm (2X) 3300x2600 mm
kW	3 kW
AIR	7 bar [100 psi] - 10 l/min

CLA6DW

MAX	(1X) 6100x3300 mm (2X) 3700x2600 mm
kW	3 kW
AIR	7 bar [100 psi] - 10 l/min

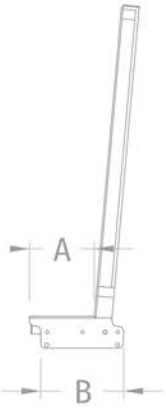

	A		B
CLA6D-200 / CLA6DW-200	200 mm	8000 kg	335 mm
CLA6D-250 / CLA6DW-250	250 mm	10000 kg	385 mm
CLA6D-300 / CLA6DW-300	300 mm	12000 kg	435 mm
CLA6D-350 / CLA6DW-350	350 mm	14000 kg	505 mm
CLA6D-400 / CLA6DW-400	400 mm	16000 kg	555 mm

CLA6D

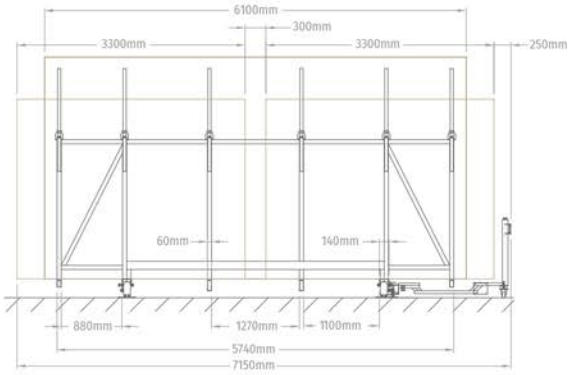

CLA6DW

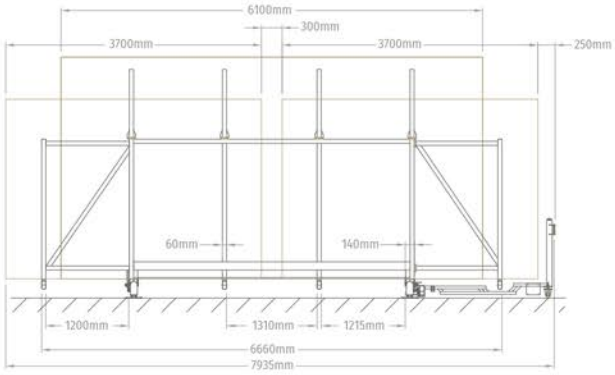

CLA6D I CLA6DW

L (mm) = ΣB + 850 (O) + 485

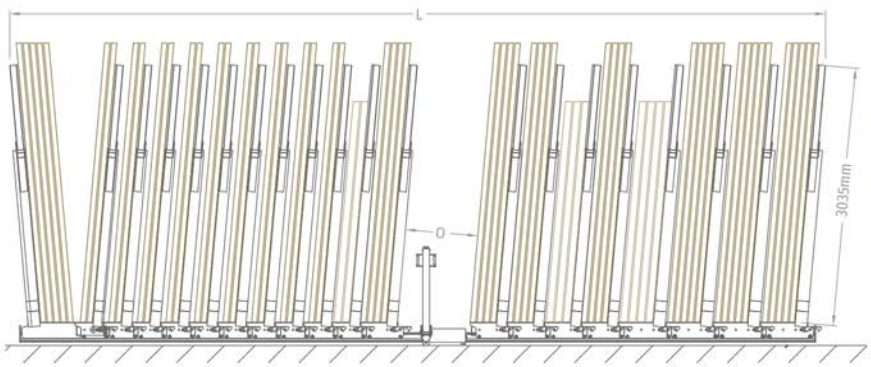

TILTING SECURITY SHAPE

PICTOGRAMS

- ELECTRICAL POWER
- NOMINAL ELECTRIC POWER
- ENERGY AUTONOMY BY BATTERIES
- PNEUMATIC SUPPLY
- MAXIMUM LOAD CAPACITY
- MAXIMUM LOAD CAPACITY ACCORDING EN-13155
- TILTING EQUIPMENT
- MANUALLY TILTING EQUIPMENT
- PNEUMATIC TILTING EQUIPMENT
- MOTORIZED TILTING EQUIPMENT
- HYDRAULIC TILTING EQUIPMENT
- ROTATION EQUIPMENT
- MANUAL ROTATION EQUIPMENT
- PNEUMATIC ROTATION EQUIPMENT
- MOTORIZED ROTATION EQUIPMENT
- HYDRAULIC ROTATION EQUIPMENT
- EQUIPMENT WEIGHT
- VACUUM SYSTEM AIR FLOW
- PUSHBUTTON CABLE LENGTH
- WIRELESS PUSHBUTTON
- LOAD CAPACITY ACCORDING EN-13155
- EQUIPMENT SUPPORT SYSTEM
- LIFTING CRANE USABLE ROTATION

TECNOCAT
GLASS MOVEMENT

TECNOCAT 21, S.L. Av. del Coure 4, Pol.Ind. Argenteria 43470 - La Selva del Camp (Tarragona) SPAIN
+34 977 76 61 97 | info@tecnocat.com **www.tecnocat.com**