



TECNOCAT ELEVATION SYSTEMS

PLM

PLM

ELEVATION SYSTEMS

PLM



OPTIONAL

- HOIST 250 KG. OR 500 KG.



PLM ONE MOBILE BRIDGE

BRIDGE CAPACITY (KG)	BEAM LENGTH	RAIL LENGTH									
		6 m.	12 m.	18 m.	23 m.	29 m.	35 m.	41 m.	47 m.	53 m.	+ m. →
PLM - 500 KG	6 m.	6 m.	12 m.	18 m.	23 m.	29 m.	35 m.	41 m.	47 m.	53 m.	+ m. →
PLM - 1000 KG	6 m.	6 m.	12 m.	18 m.	23 m.	29 m.	35 m.	41 m.	47 m.	53 m.	+ m. →
PLM - 500 KG	9 m.	6 m.	12 m.	18 m.	23 m.	29 m.	35 m.	41 m.	47 m.	53 m.	+ m. →
Type of connection: Hanged electric wire or pneumatic tube wire						Type of connection: Only electrified rail connection					


PL2M TWO MOBILE BRIDGES

BRIDGE CAPACITY (KG)	BEAM LENGTH	RAIL LENGTH									
		6 m.	12 m.	18 m.	23 m.	29 m.	35 m.	41 m.	47 m.	53 m.	+ m. →
P2LM - 500 KG	6 m.	6 m.	12 m.	18 m.	23 m.	29 m.	35 m.	41 m.	47 m.	53 m.	+ m. →
P2LM - 1000 KG	9 m.	6 m.	12 m.	18 m.	23 m.	29 m.	35 m.	41 m.	47 m.	53 m.	+ m. →
Type of connection: Hanged electric wire or pneumatic tube wire						Type of connection: Only electrified rail connection					


PLM ONE MOBILE BRIDGE (EXAMPLE)

WIDTH AND LENGHT


PLM 6x6

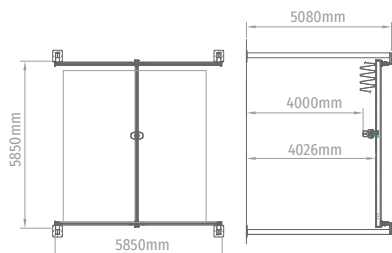

PLM 6x12

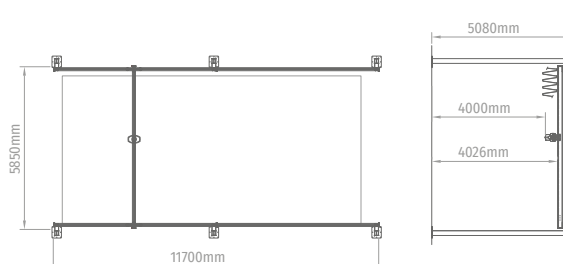


PLM 9x18

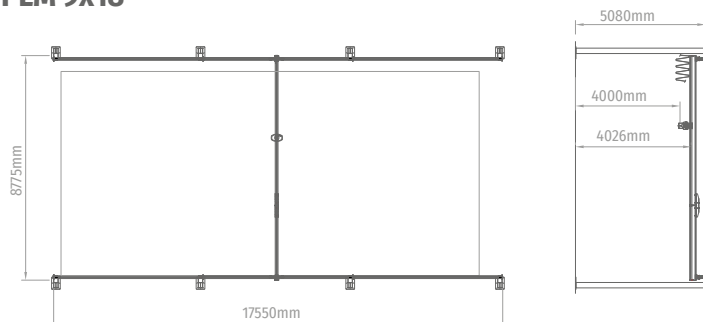

PL2M TWO MOBILE BRIDGES (EXAMPLE)

WIDTH AND LENGHT

PL2M 6x29

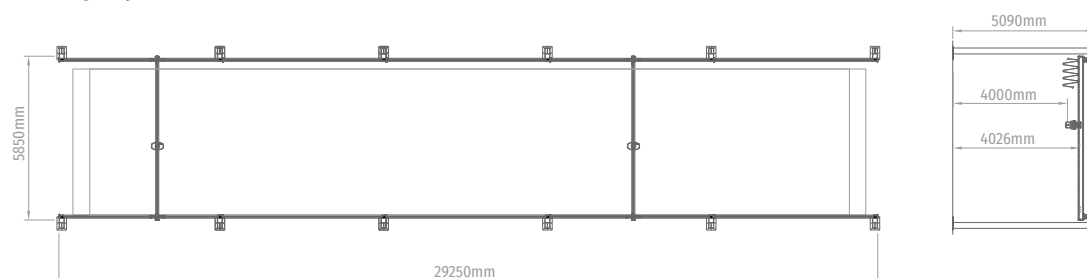

PICTOGRAMS



ELECTRICAL POWER



MANUAL ROTATION EQUIPMENT



NOMINAL ELECTRIC POWER



PNEUMATIC ROTATION EQUIPMENT



ENERGY AUTONOMY BY BATTERIES



MOTORIZED ROTATION EQUIPMENT



PNEUMATIC SUPPLY



HYDRAULIC ROTATION EQUIPMENT



MAXIMUM LOAD CAPACITY



EQUIPMENT WEIGHT



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



VACUUM SYSTEM AIR FLOW



TILTING EQUIPMENT



PUSHBUTTON CABLE LENGTH



MANUALLY TILTING EQUIPMENT



WIRELESS PUSHBUTTON



PNEUMATIC TILTING EQUIPMENT



LOAD CAPACITY ACCORDING EN-13155



MOTORIZED TILTING EQUIPMENT



EQUIPMENT SUPPORT SYSTEM



HYDRAULIC TILTING EQUIPMENT



LIFTING CRANE USABLE ROTATION



ROTATION EQUIPMENT