


TECNOCAT HANDLING

VF2

VF2

HANDLING

VF2-F12

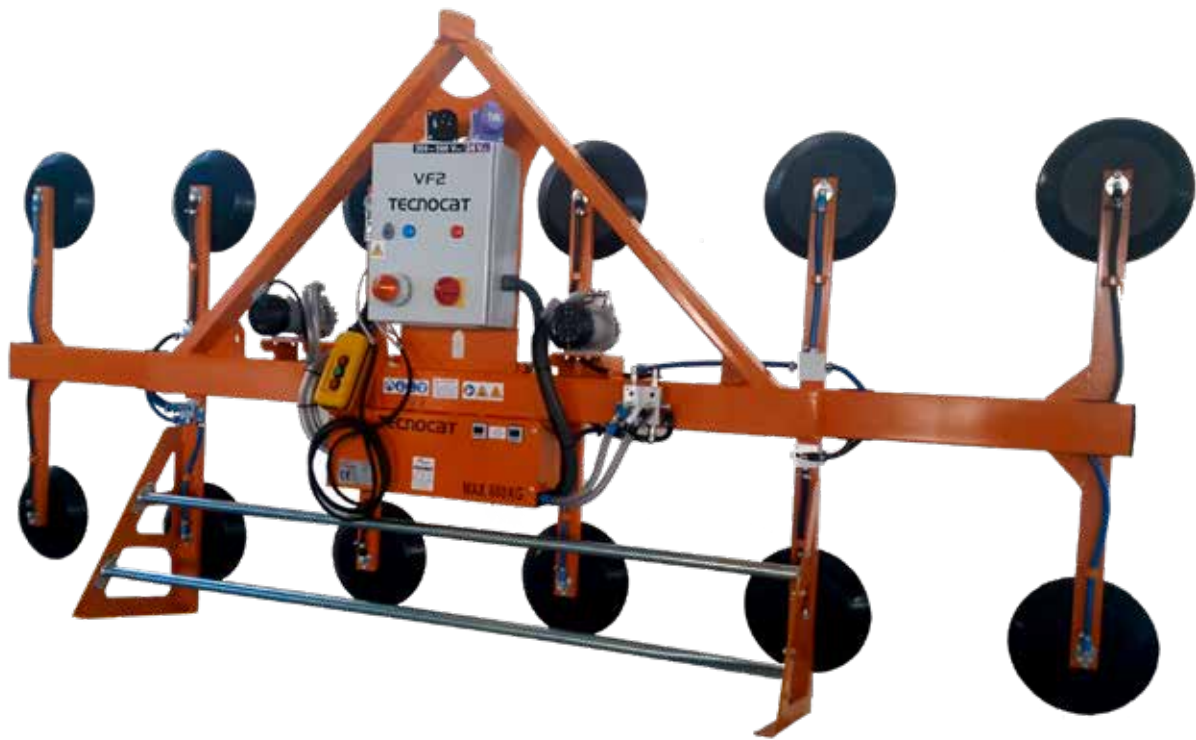

HANDLING

VF2-F6

 600 kg
 300 kg
 100 kg



VF2-F8

 800 kg
 400 kg
 126 kg


VF2-F10

 1000 kg
 500 kg
 146 kg

VF2-F12

 1200 kg
 600 kg
 200 kg

VF2-F14

 1400 kg
 700 kg
 240 kg


VF2-F16

 1600 kg
 800 kg
 280 kg


ENH3ISS	OK
kW	850 W
TC	—
	3 m
	OPTIONAL

	200 - 500 VAC (50 - 60 Hz) + 24 VDC
	80 L/min
	—
	—
	OK

VF2-F6 EXAMPLE

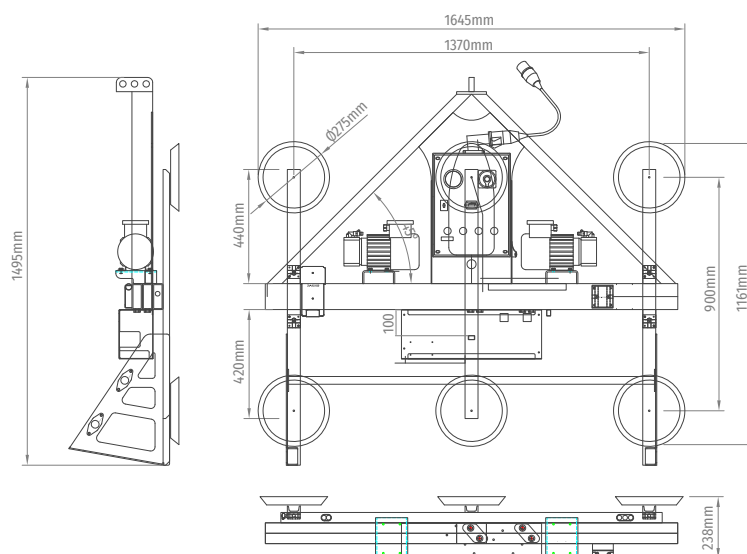

VF2-F16 EXAMPLE

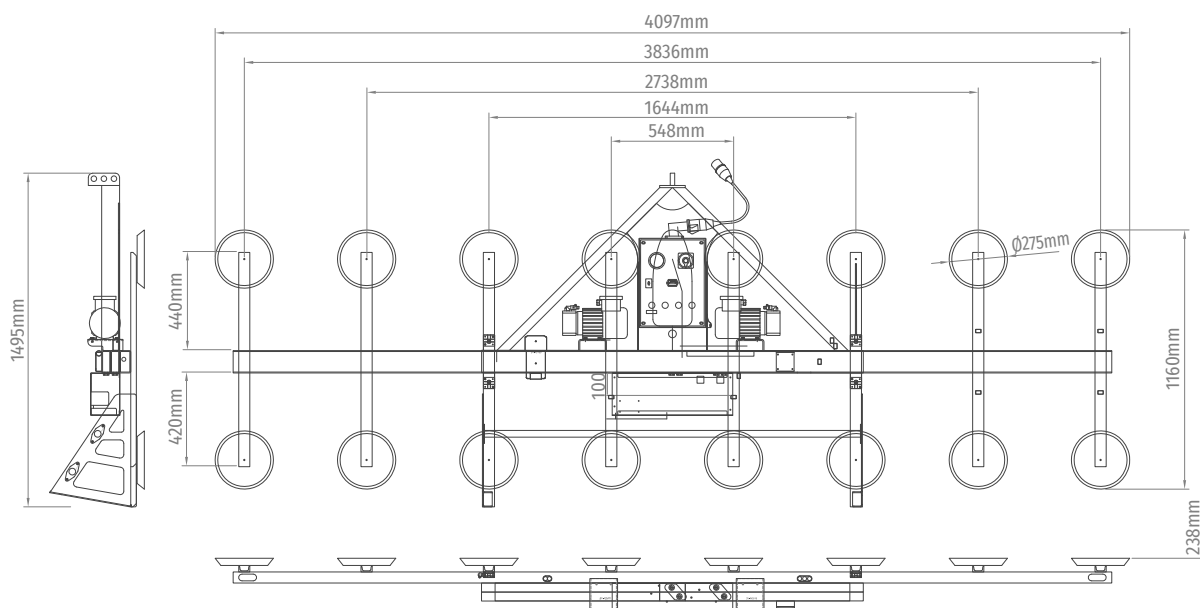

PICTOGRAMS



ELECTRICAL POWER



MANUAL ROTATION EQUIPMENT



NOMINAL ELECTRIC POWER



PNEUMATIC ROTATION EQUIPMENT



ENERGY AUTONOMY BY BATTERIES



MOTORIZED ROTATION EQUIPMENT



PNEUMATIC SUPPLY



HYDRAULIC ROTATION EQUIPMENT



MAXIMUM LOAD CAPACITY



EQUIPMENT WEIGHT



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



VACUUM SYSTEM AIR FLOW



TILTING EQUIPMENT



PUSHBUTTON CABLE LENGTH



MANUALLY TILTING EQUIPMENT



WIRELESS PUSHBUTTON



PNEUMATIC TILTING EQUIPMENT



LOAD CAPACITY ACCORDING EN-13155



MOTORIZED TILTING EQUIPMENT



EQUIPMENT SUPPORT SYSTEM



HYDRAULIC TILTING EQUIPMENT



LIFTING CRANE USABLE ROTATION



ROTATION EQUIPMENT