



TECNOCAT HANDLING

VX60-BE

VX60-BE

HANDLING

VX60-BE12

VX60-BE12

 1000 kg

 472 kg

VX60-BE15




 1500 kg

 485 kg




HANDLING

EN4355	—
kW	950 W
	3 m.
	OK

	230 VAC (50 - 60 Hz) Monophase OPTIONAL: 230 VAC (50 - 60 Hz) Triphase OPTIONAL: 400 VAC (50 - 60 Hz) Triphase
	80 L/min
	—

VX60-BE15

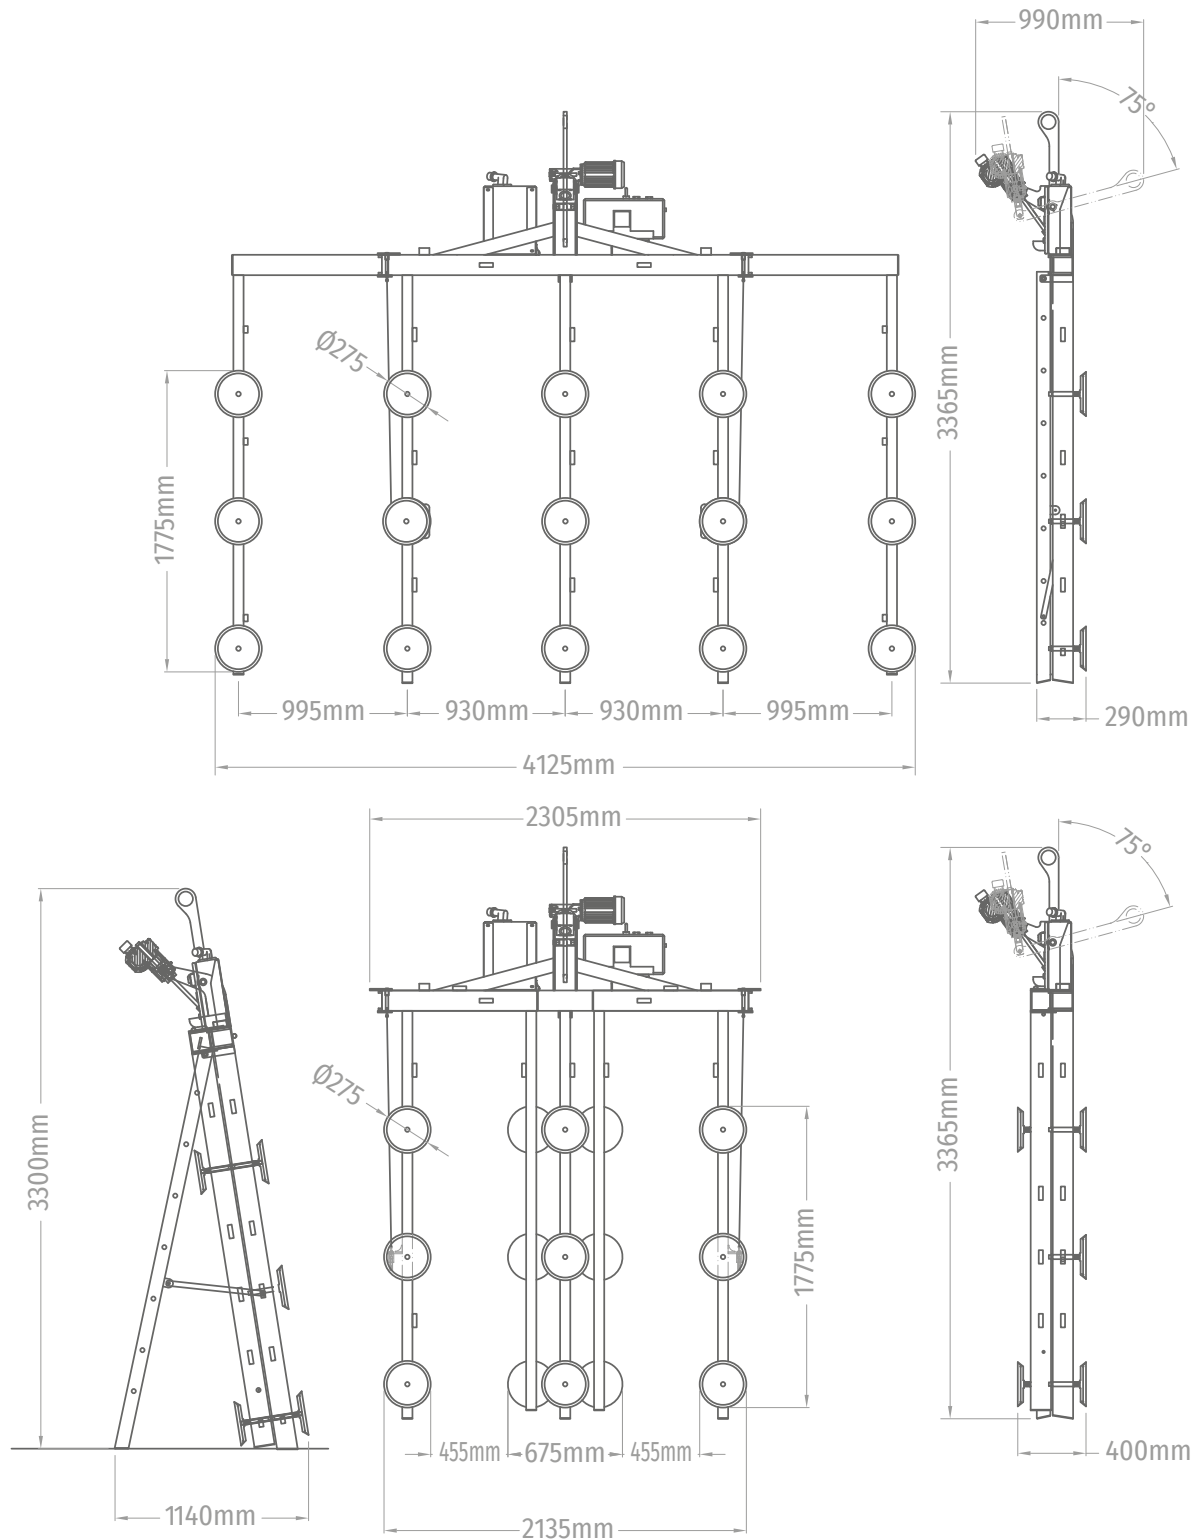

HANDLING

PICTOGRAMS



ELECTRICAL POWER



NOMINAL ELECTRIC POWER



ENERGY AUTONOMY BY BATTERIES



PNEUMATIC SUPPLY



MAXIMUM LOAD CAPACITY



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



TILTING EQUIPMENT



MANUALLY TILTING EQUIPMENT



PNEUMATIC TILTING EQUIPMENT



MOTORIZED TILTING EQUIPMENT



HYDRAULIC TILTING EQUIPMENT



ROTATION EQUIPMENT



MANUAL ROTATION EQUIPMENT



PNEUMATIC ROTATION EQUIPMENT



MOTORIZED ROTATION EQUIPMENT



HYDRAULIC ROTATION EQUIPMENT



EQUIPMENT WEIGHT



VACUUM SYSTEM AIR FLOW



PUSHBUTTON CABLE LENGTH



WIRELESS PUSHBUTTON



LOAD CAPACITY ACCORDING EN-13155



EQUIPMENT SUPPORT SYSTEM



LIFTING CRANE USABLE ROTATION